

Data sheet


Temp. Range	-25 / 70 °C
Water Resistance	Good
Chemical Resist.	Fair
Oil Resistance	Poor
Flame Resistance	Poor
Hydolysis resistance (60°C water)	Poor

Rubber

NBR/SBR compound
 Elongation (Range %) 450 % – 600 %
 Tensile Strength Range: 500 – 3,000 PSI
 Abrasion resistance: 130mm³ DIN 53516 - 10N
 Hardness: 70° ±5 shore A


Polyurethane

Polyester compound
 Laceration resistance: 115 Kgf/cm - ASTM D624
 Tensile Strength: 285 kg/cm² - ASTM D412
 Abrasion resistance: 35mg ASTM D4060- TABER H22 1000g 500 Rpm
 Hardness: 80° ±5 shore A

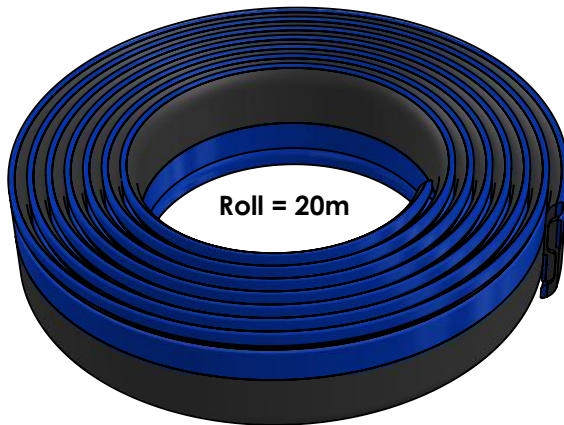

T°C min/max	-25	+70
pH min/max	4	10

Dimensions

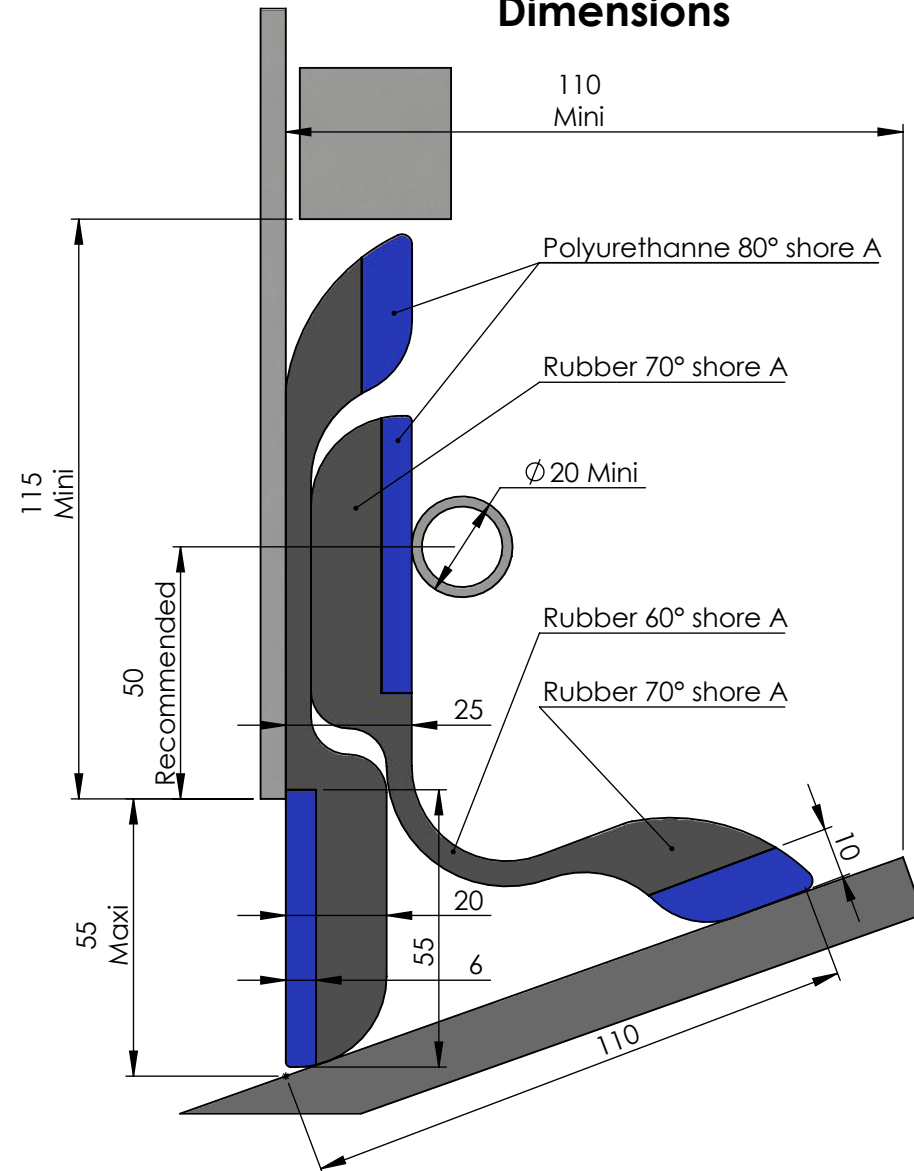


Vapeur/Steam
Dampf



Huile/Oil/Öl



GeminiSkirt



Format A4

Plan N° **200316 112**

Scale 1:1.5